

Data sheet of Dielectric Chip Antenna

Part No. : CTi-AMAN903012



January 23, 2008

The contents of this data sheet are subject to change without notice. Please confirm the specifications and delivery conditions when placing your order.

1. SPECIFICATIONS

1.1 Electrical Specifications


No	ITEM	SPEC.	Remark
1	Frequency Range	2.4 ~2.485 GHz	for ISM
2	VSWR	2.5 : 1 max.	
3	Gain	Avg. -3 dBi min.	
4	Polarization	Linear	
5	Azimuth Beam Pattern	Omni-directional	
6	Impedance	Nominal 50 Ω	

※ These values are measured on the matched reference test board.

1.2 Mechanical Specifications

No	ITEM	Spec.		Remark
1	Electrode	Ag		Pb-free
2	Dimensions (L*W*H)	AMAN903012	9.0 * 3.0 * 1.2	mm
3	Unit Weight	AMAN903012	120 ± 8	mg
4	Operating Temperature	-35 ~ +85		°C

1.3 Appearance and Dimensions

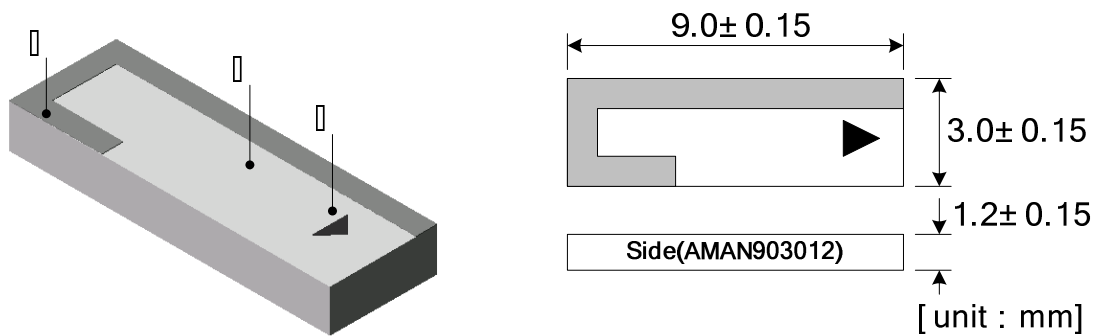


No	Name	Function	Material
1	Electrode	Radiation Element	Ag
2	Ceramic Body	-	Ceramic
3	Direction Index	Feeding Direction	




WOOLMER WAY, BORDON, HAMPSHIRE, UK, RG35 9QE
 TEL; 0044 1420 476767 www.cti-int.net

2. MEASUREMENT


2.1 Reference Test Board for Measurement

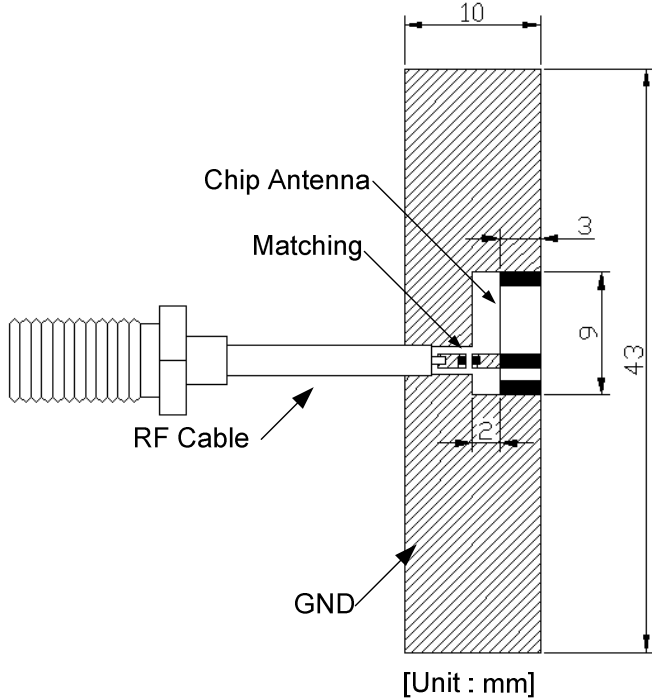

2.2 Diagram for VSWR measurement

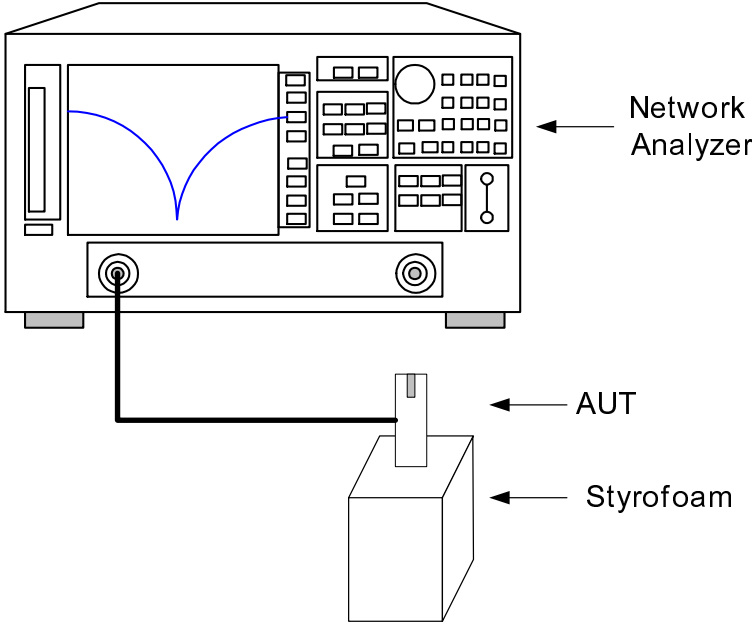

2.3 Diagram for radiation gain and pattern measurements

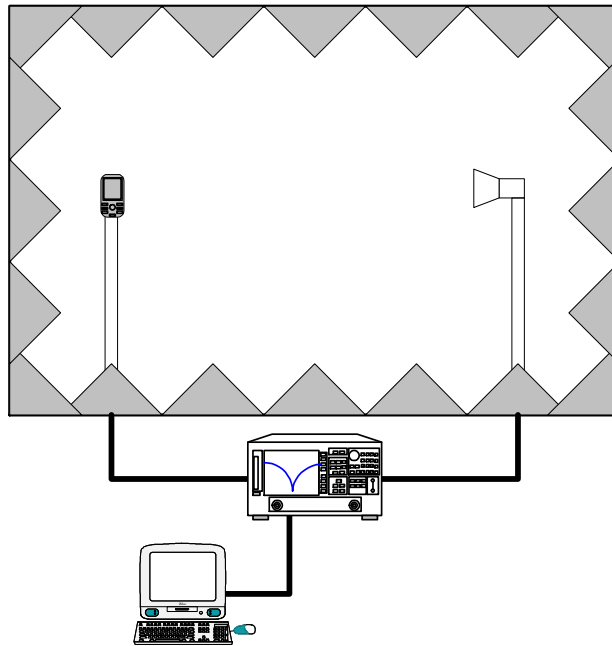


A. Anechoic chamber spec.

Parameters	Condition	Unit
Chamber size	8x4x4	m
Temperature	21.5	°C
Humidity	55	% RH
Measurement	S21 (8753ES)	
System software	Midas (Orbit/FR)	

B. Measurement coordinates

Measurement Plane	Symbol	Rotating direction
Azimuth	Azimuth	$x \rightarrow y$
Elevation1	E1	$z \rightarrow x$
Elevation2	E2	$z \rightarrow -y$




WOOLMER WAY, BORDON, HAMPSHIRE, UK, RG35 9QE
 TEL; 0044 1420 476767 www.cti-int.net


3. MEASUREMENT RESULT

3.1 VSWR & Smithchart


A. Matching Value (recommend for reference testboard only)

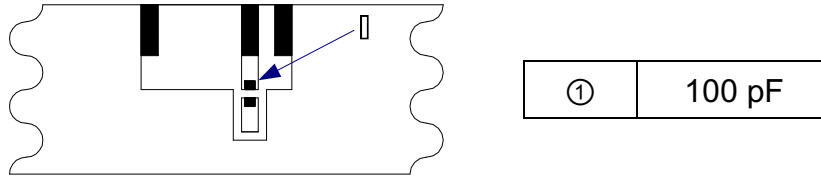

B. Measured data

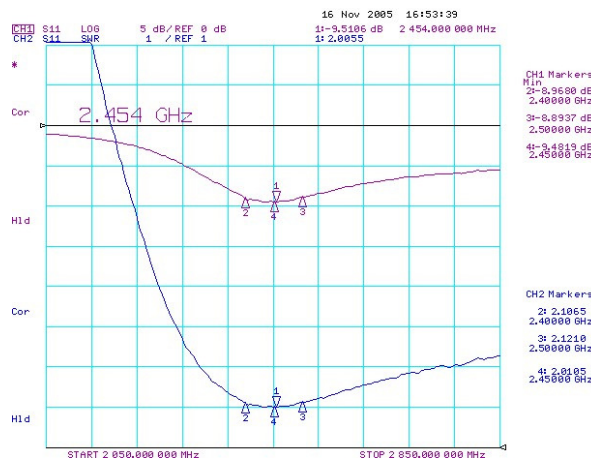

[VSWR : AMAN903012 on the testboard]

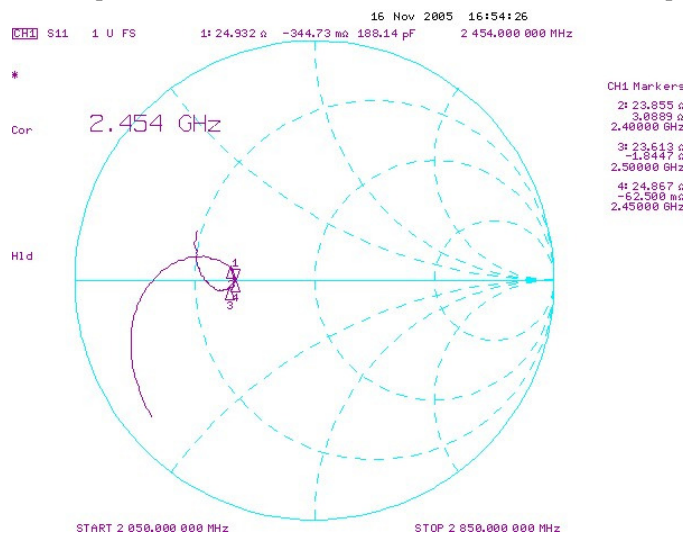

[Smithchart : AMAN903012 on the testboard]




WOOLMER WAY, BORDON, HAMPSHIRE, UK, RG35 9QE
 TEL; 0044 1420 476767 www.cti-int.net


3.2 Radiation Gain and Pattern

[Measured data table]

	Peak Gain [dBi]	Average Gain [dBi]	Remark
Azimuth	3.6	1.5	@2.45 GHz
Elevation1	3.0	-0.7	@2.45 GHz
Elevation2	2.2	-1.3	@2.45 GHz

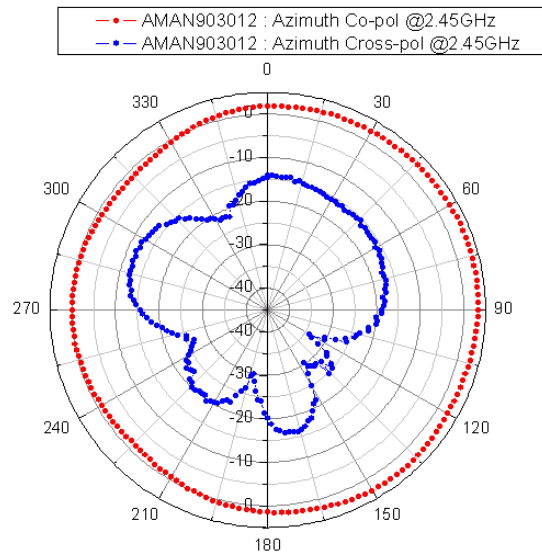


[Radiation pattern of AMAN903012: Azimuth@2.45GHz]

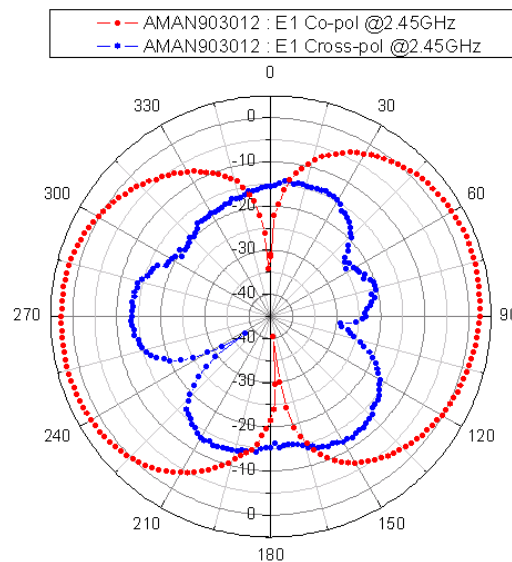

[Radiation pattern of AMAN903012: Elevation1@2.45GHz]




WOOLMER WAY, BORDON, HAMPSHIRE, UK, RG35 9QE
 TEL; 0044 1420 476767 www.cti-int.net

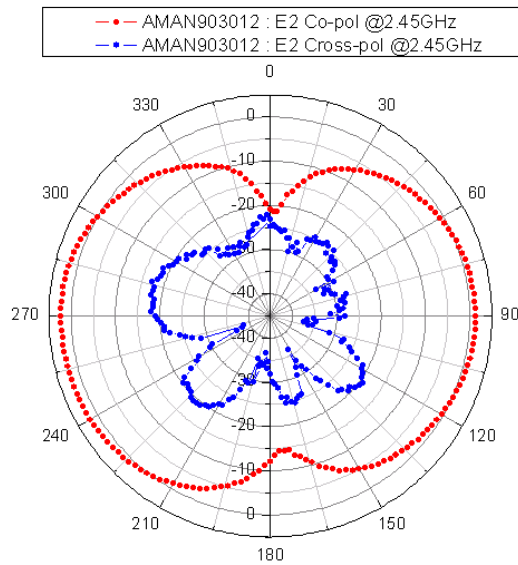

[Radiation pattern of AMAN903012: Elevation2@2.45GHz]

4. RELIABILITY TEST

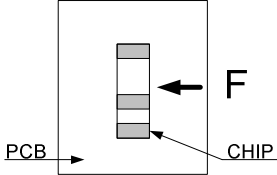No	ITEM	TEST CONDITION	TEST REQUIREMENTS
1	Adhesive Strength of Termination	1. Applied force on SMD chip till detached point from PCB. 	1. No mechanical damage by forces applied on the right. 2. Strength (F) > 5 kgf
2	Thermal Shock (Temperature Cycle)	1. 1 cycle / step 1 : $-40 \pm 3^\circ\text{C}$, 30 min step 2 : $+125 \pm 3^\circ\text{C}$, 30 min 2. Number of cycle : 30 3. Measure after left for 48 hrs min. at room temperature	1. No visual damage 2. Within electric spec (VSWR)
3	High Temperature Resistance	1. Temperature : $+125 \pm 5^\circ\text{C}$ 2. Time : 1000 ± 24 hrs 3. Measure f_c after left for 24 hrs min. at room temperature	1. No visual damage 2. Within electric spec (VSWR)




WOOLMER WAY, BORDON, HAMPSHIRE, UK, RG35 9QE
 TEL; 0044 1420 476767 www.cti-int.net

4	Low Temperature Resistance	1. Temperature : $-40 \pm 5^{\circ}\text{C}$ 2. Time : 1000 ± 24 hrs 3. Measure f_c after left for 48 hrs min. at room temperature	1. No visual damage 2. Within electric spec (VSWR)
5	Humidity (Steady Condition)	1. Humidity : 85 % RH 1. Temperature : $+85 \pm 3^{\circ}\text{C}$ 2. Time : 1000 ± 24 hrs 3. Measure f_c after left for 48 hrs min. at room temperature	1. No visual damage 2. Within electric spec (VSWR)

5. SOLDERING RECOMMENDATIONS

5.1 Reflow Soldering Profile

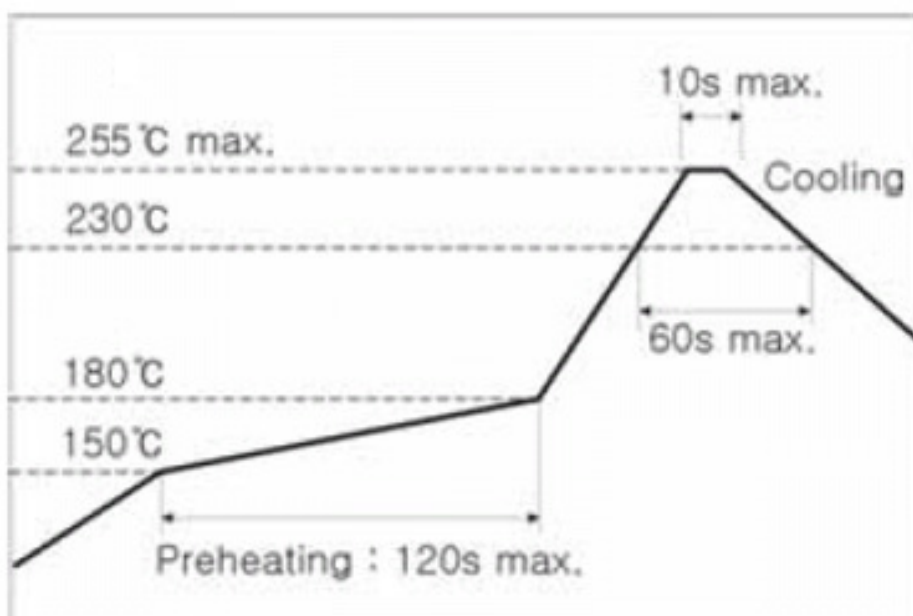


[Soldering Reflow Profile for Pb-free]



WOOLMER WAY, BORDON, HAMPSHIRE, UK, RG35 9QE
 TEL; 0044 1420 476767 www.cti-int.net


5.2 Soldering Land Pattern

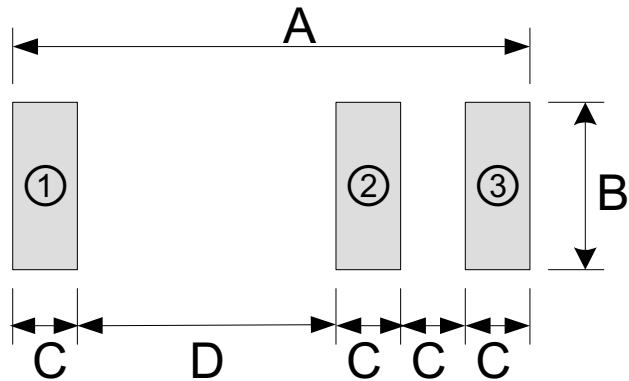

Item	Dimension [mm]	Item	Function
A	9.0	①	GND
B	3.0	②	Feeding
C	1.0	③	GND
D	5.0	-	-

6. PACKING


6.1 Tape Dimension (unit : mm)

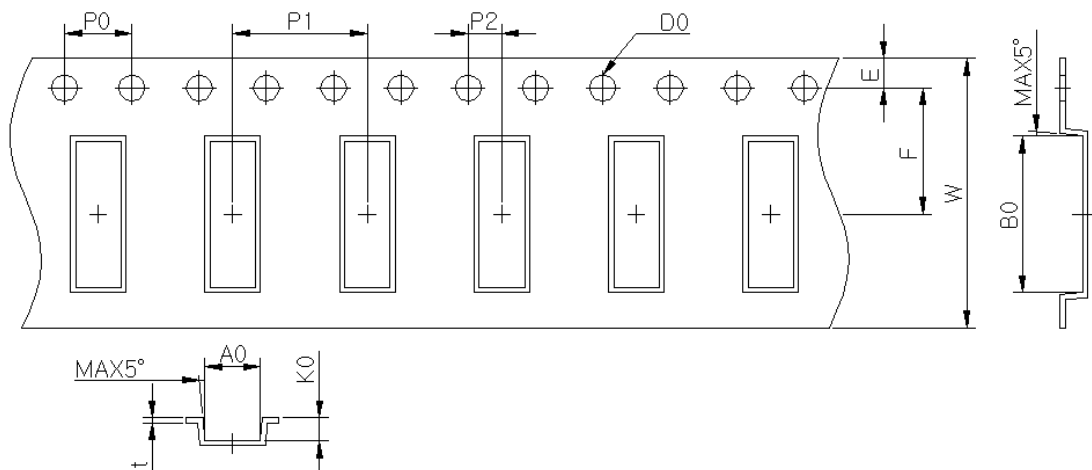

WOOLMER WAY, BORDON, HAMPSHIRE, UK, RG35 9QE
 TEL; 0044 1420 476767 www.cti-int.net

A0	3.20 +0.00/-0.10	P0	4.00±0.10	E	1.75±0.10
B0	9.20 +0.00/-0.01	P1	8.00±0.10	F	7.50±0.10
K0	1.65±0.10	P2	2.00±0.10	W	16.00±0.30
D0	1.55±0.05			t	0.30±0.05

6.2 Taping Style

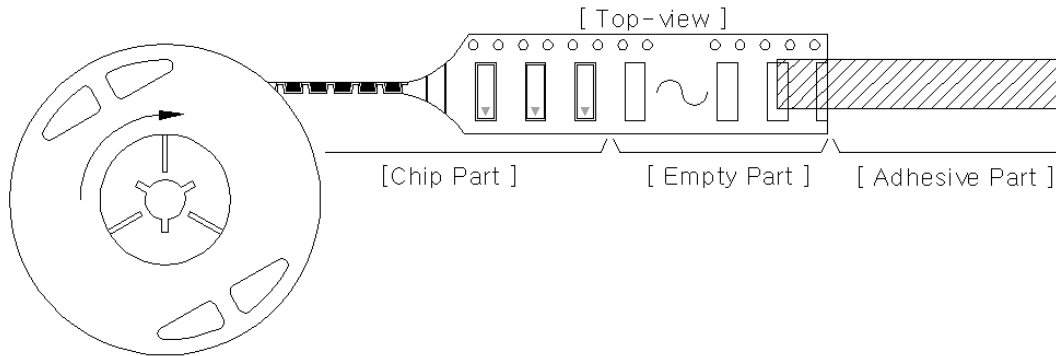

6.3 Packing Unit

	Quantity	Size
Reel	2,000 ea	Φ7" * 16mm
Small Box	6,000 ea (3 reel*2,000ea/reel)	185 * 185 * 68 (mm ³)
Middle Box	30,000 ea (5 small box*6,000ea/small box)	365 * 200 * 200 (mm ³)
Large Box	84,000 ea (14 small box*6,000ea/small box)	390 * 390 * 280 (mm ³)

7. STORAGE CONDITION

- A. Storage environment must be at an ambient temperature of 15~35°C and an ambient humidity of 45~75 % RH. (MSL Level 2)
- B. Chip antenna can experience degradation of termination solderability when subjected to high temperature of humidity, or if exposed to sulfur or chlorine gases.
- C. Avoid mechanical shock (ex. falling) to the chip antenna to prevent mechanical cracking inside of the ceramic dielectric due to its own weight.



WOOLMER WAY, BORDON, HAMPSHIRE, UK, RG35 9QE
 TEL; 0044 1420 476767 www.cti-int.net